

# AFLR4 Analysis Interface Module (AIM) Manual

Ryan Durscher  
AFRL/RQVC

November 28, 2025



0.1 Introduction . . . . .	1
0.1.1 AFLR4 AIM Overview . . . . .	1
0.1.2 Clearance Statement . . . . .	1
0.2 AIM Attributes . . . . .	2
0.3 AIM Inputs . . . . .	4
0.4 AIM Outputs . . . . .	7
0.5 Mesh Sizing . . . . .	8
0.5.1 JSON String Dictionary . . . . .	8
0.5.2 Single Value String . . . . .	9
Bibliography . . . . .	11
Index . . . . .	13



## 0.1 Introduction

### 0.1.1 AFLR4 AIM Overview

A module in the Computational Aircraft Prototype Syntheses (CAPS) has been developed to interact with the unstructured, surface grid generator AFLR4 [2] [1].

The AFLR4 AIM provides the CAPS users with the ability to generate "unstructured, 3D surface grids" using an "↔ Advancing-Front/Local-Reconnection (AFLR) procedure." Both triangular and quadrilateral elements are supported.

An outline of the AIM's inputs, outputs and attributes are provided in [AIM Inputs](#) and [AIM Outputs](#) and [AIM Attributes](#), respectively. The complete AFLR documentation is available at the [SimCenter](#).

Example surface meshes:

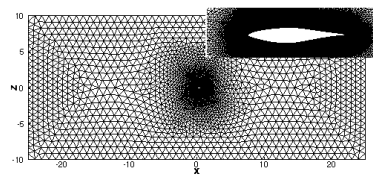


Figure 1 AFLR4 meshing example - 2D Airfoil




Figure 2 AFLR4 meshing example - Sphere




Figure 3 AFLR4 meshing example - Wing

### 0.1.2 Clearance Statement

This software has been cleared for public release on 05 Nov 2020, case number 88ABW-2020-3462.

## 0.2 AIM Attributes

The following list of attributes are available to guide the mesh generation with the AFLR4 AIM.

- **capsMeshLength** [Required BODY attribute] This numeric *BODY* attribute sets the AFLR4 *ref\_len* input. *capsMeshLength* should be a positive value representative of a characteristic length of the geometry, e.g. the MAC of a wing or diameter of a fuselage. The AIM input *Mesh\_Length\_Factor* may be used to apply a global scaling to increase or decrease the mesh resolution.

From the AFLR4 documentation:

*ref\_len*:

Reference length for components/bodies in grid units. Reference length should be set to a physically relevant characteristic length for the configuration such as wing chord length or pipe diameter. If *ref\_len* = 0 then it will be set to the bounding box for the largest component/body of interest.

The parameters *ref\_len*, *max\_scale*, *ideal\_min\_scale* and *abs\_min\_scale* are all used to set spacing values on all component/body surfaces (those that are not on the farfield or symmetry plane-if any).

$\text{max\_spacing} = \text{max\_scale} * \text{ref\_len}$

$\text{min\_spacing} = \text{ideal\_min\_scale} * \text{ref\_len}$

$\text{abs\_min\_spacing} = \text{abs\_min\_scale} * \text{ref\_len}$

- **AFLR\_GBC** [Optional FACE attribute: Default STD\_UG3\_GBC] This string *FACE* attribute informs AFLR4 what BC treatment should be employed for each geometric *FACE*. The BC defaults to the string STD\_UG3\_GBC if none is specified.

Predefined AFLR Grid BC string values are:

AFLR_GBC String	Description
FARFIELD_UG3_GBC	farfield surface same as a standard surface except w/AFLR4
STD_UG3_GBC	standard surface
-STD_UG3_GBC	standard BL generating surface
BL_INT_UG3_GBC	symmetry or standard surface that intersects BL region
TRANSP_SRC_UG3_GBC	embedded/transparent surface converted to source nodes by AFLR
TRANSP_BL_INT_UG3_GBC	embedded/transparent surface that intersects BL region
TRANSP_UG3_GBC	embedded/transparent surface
-TRANSP_UG3_GBC	embedded/transparent BL generating surface
TRANSP_INTRNL_UG3_GBC	embedded/transparent surface converted to internal faces by AFLR
FIXED_BL_INT_UG3_GBC	fixed surface with BL region that intersects BL region

Within AFLR4 the grid BC determines how automatic spacing is applied. There are four basic Grid BC types that

are each treated differently.

1. Faces/surfaces that are part of the farfield should be given a FARFIELD\_UG3\_GBC Grid BC. Farfield faces/surfaces are given a uniform spacing independent of other faces/surfaces with different Grid BCs.
2. Faces/surfaces that represent standard solid surfaces should be given either a STD\_UG3\_GBC or -STD\_UG3\_GBC (BL generating) Grid BC. Standard surfaces are given a curvature dependent spacing that may be modified by proximity checking.
3. Faces/surfaces that intersect a BL region should be given either a BL\_INT\_UG3\_GBC (standard boundary surface) or TRANSP\_BL\_INT\_UG3\_GBC (embedded/ transparent surface with volume mesh on both sides) Grid BC. A common example for the BL\_INT\_UG3\_GBC Grid BC is a symmetry plane. Faces/surfaces set as BL intersecting surfaces are excluded from auto spacing calculations within AFLR4 and use edge spacing derived from their neighbors.
4. Surfaces set as transparent surfaces will have a volume mesh on both sides. They can have free edges and can have non-manifold connections to standard solid surfaces and/or BL intersecting surfaces. Vertices in the final surface mesh are not duplicated at non-manifold connections. Transparent surfaces use curvature driven surface spacing as used on standard solid surfaces. However, at non-manifold connections with standard solid surfaces they inherit the surface spacing set on the solid surface they are attached to. They are also excluded from proximity checking. Typical examples of transparent surfaces include wake sheets or multi-material interface surfaces.

- **AFLR4\_Cmp\_ID** [Optional FACE attribute]

EGADS attribute AFLR4\_Cmp\_ID represents the component identifier for a given face/surface. Component IDs are used for proximity checking. Proximity is only checked between different components. A component is one or more CAD surfaces that represent a component of the full configuration that should be treated individually. For example, a wing-body-strut-nacelle configuration could be considered as four components with wing surfaces set to component 1, body surfaces set to component 2, nacelle surfaces set to 3, and store surfaces set to 4. If each component is a topologically closed surface/body then there is no need to set components. If component IDs are not specified then component identifiers are set for each body defined in the EGADS model or topologically closed surfaces/bodies of the overall configuration. Proximity checking is disabled if there is only one component/body defined. Note that proximity checking only applies to standard surfaces. Component identifiers are set by one of three methods, chosen in the following order.

1. If defined by EGADS attribute AFLR4\_Cmp\_ID then attribute sets component identifier.
2. Else, if multiple bodies are defined in the EGADS model then bodies index is used to set component identifier.
3. Else, component identifiers are set an index based on topologically closed surfaces/bodies of the overall configuration.

- **AFLR4\_Isolated\_Edge\_Refinement\_Flag** [Optional FACE attribute: Integer Range 0 to 2]  
Isolated edge refinement flag. If Flag = 0 then do not refine isolated interior edges. If Flag = 1 then refine isolated interior edges if the surface has local curvature (as defined using `cier`). If Flag = 2 then refine all isolated interior edges. An isolated interior edges is connected only to boundary nodes. Isolated edges are refined by placing a new node in the middle of the edge. Note that if not set then the isolated edge refinement flag is set to the global value `AFLR4_mier`.
- **AFLR4\_Edge\_Refinement\_Weight** [Optional FACE attribute: Default 0.0, Range 0 to 1]  
EGADS attribute `AFLR4_Edge_Refinement_Weight` represents the edge mesh spacing scale factor weight for a given face/surface. Edge mesh spacing can be scaled on a given face/surface based on the discontinuity level between adjacent faces/surfaces on both sides of the edge. The edge mesh spacing scale factor weight set with `AFLR4_Edge_Refinement_Weight` is used as an interpolation weight between the unmodified spacing and the modified spacing. A value of one applies the maximum modification and a value of zero applies no change in edge spacing. Note that no modification is done to edges that belong to farfield or BL intersecting face/surface.
- **AFLR4\_Scale\_Factor** [Optional FACE or EDGE attribute: Default 1.0]  
EGADS attribute `AFLR4_Scale_Factor` represents the `AFLR4` mesh spacing scale factor for a given face/edge. Curvature dependent spacing can be scaled on the face/edge by the value of the scale factor set with `AFLR4_Scale_Factor`.
- **AFLR4\_quad\_local** [Optional FACE attribute: Default 0.0]  
Local quad-face combination flag.  
If `AFLR4_quad_local` is set to 0, then do not combine tria-faces to form quad-faces.  
If `AFLR4_quad_local` is set to 1, then combine tria-faces to form quad-faces.  
This option also locally selects advancing-point point placement rather than the default advancing-front point placement. Note that if not set then the local quad-face combination flag is set to the global quad-face combination flag `AFLR4_quad`.

## 0.3 AIM Inputs

The following list outlines the `AFLR4` meshing options along with their default value available through the AIM interface.

Please consult the [AFLR4 documentation](#) for default values not present here.

- **Proj\_Name = "aflr4\_CAPS"**  
Output name prefix for meshes to be written in formats specified by `Mesh_Format`. These meshes are not linked to any analysis, but may be useful exploring meshing parameters.
- **Mesh\_Format = NULL**  
Optional list of string mesh formats to generate meshes not linked to analysis.  
Available format names include: "exodus", "fast", "libMeshb", "stl", "bstl", "su2", "tecplot", "ugrid", "vtk", "bvtk", "vtu", "wavefront".  
where the "b" prefix indicates binary version.
- **Mesh\_Quiet\_Flag = False**  
Complete suppression of mesh generator (not including errors)



- **Mesh\_Gen\_Input\_String = NULL**

Meshing program command line string (as if called in bash mode). Use this to specify more complicated options/use features of the mesher not currently exposed through other AIM input variables. Note that this is the exact string that will be provided to the volume mesher; no modifications will be made. If left NULL an input string will be created based on default values of the relevant AIM input variables.

- **ff\_cdf**

Farfield growth rate for field point spacing.

The farfield spacing is set to a uniform value dependent upon the maximum size of the domain, maximum size of inner bodies, max and min body spacing, and farfield growth rate. ;

$ff\_spacing = (ff\_cdf - 1) * L + (min\_spacing + max\_spacing) / 2$  ;

where L is the approximate distance between inner bodies and farfield.

- **min\_ncell**

Minimum number of cells between two components/bodies.

Proximity of components/bodies

to each other is estimated and surface

spacing is locally reduced if needed. Local

surface spacing is selectively reduced when

components/bodies are close and their

existing local surface spacing would generate

less than the minimum number of cells

specified by min\_ncell. Proximity checking is

automatically disabled if min\_ncell=1 or if

there is only one component/body defined.

- **mer\_all <Boolean>**

Global edge mesh spacing scale factor flag.

Edge mesh spacing can be scaled on all surfaces based on discontinuity level between adjacent surfaces on both sides of the edge. For each surface the level of discontinuity (as defined by angerw1 and angerw2) determines the edge spacing scale factor for potentially reducing the edge spacing. See erw\_ids and erw\_list. This option is equivalent to setting erw\_ids equal to the list of all surface IDS and the edge mesh spacing scale factor weight in erw\_list equal to one. Note that no modification is done to edges that belong to surfaces with a grid BC of farfield (ff\_ids) or BL intersecting (int\_ids).

- **no\_prox**

Disable proximity check flag.

If no\_prox=False then proximity of components/bodies to each other is estimated and surface spacing is locally reduced if needed.

If no\_prox=True or if there is only one component/body defined then proximity checking is disabled.

- **BL\_thickness**

Boundary layer thickness for proximity checking.

Proximity of components/bodies to each other is estimated and surface spacing is locally reduced if needed. Note that if the Reynolds Number, Re\_I, is set then the BL\_thickness value is set to an estimate for turbulent flow. If the set or calculated value of BL\_thickness > 0 then the boundary layer thickness is included in the calculation for the required surface spacing during proximity checking.

- **Re\_I**

Reynolds Number for estimating BL thickness.

The Reynolds Number based on reference length, Re\_I, (if set) along with reference length, ref\_len, are used to estimate the BL thickness, BL\_thickness,

for turbulent flow. If  $Re_L > 0$  then this estimated value is used to set  $BL\_thickness$ .

- **curv\_angle**

Curvature spacing angle in degrees.

For curvature refinement the spacing is derived from the curvature spacing angle and the curvature.

$Curvature = 1 / Curvature\_Radius$

$Spacing = [2 * \sin(curv\_angle/2)] / Curvature$

For example, if the surface is circular and the curvature angle is 10 degrees, this will provide mesh points spaced every 10 degrees. If the Curvature is 0, then the surface is flat and the spacing is set to the maximum spacing ( $max\_spacing = max\_scale * ref\_len$ ). Note that the curvature based spacing may be overridden by constraints imposed by surface boundary edge lengths or adjacent surfaces.

The curvature spacing angle  $curv\_angle$  replaces the previous curvature factor  $curv\_factor$  parameter.

$curv\_factor = 2 * \sin(curv\_angle/2)$

The default value for  $curv\_angle$  produces a value for the previous  $curv\_factor$  that is approximately the same as its default value.

- **erw\_all**

Global edge mesh spacing refinement weight.

Edge mesh spacing can be scaled on all surfaces (if  $mer\_all=1$ ) based on discontinuity level between adjacent surfaces on both sides of the edge.

For each surface the level of discontinuity (as defined by  $angerw1$  and  $angerw2$ )

determines the edge spacing scale factor for potentially reducing the edge

spacing. The edge mesh spacing scale factor weight is then used as an interpolation weight between the unmodified spacing and the modified spacing.

A value of one applies the maximum modification and a value of zero applies no

change in edge spacing. If the global edge mesh spacing scale factor flag,

$mer\_all$ , is set to 1 then that is equivalent to setting  $AFLR\_Edge\_Scale\_Factor\_Weight$

on all FACES to the value  $erw\_all$ . Note that no modification is

done to edges that belong to surfaces with a grid BC of farfield ( $FARFIELD\_UG3\_GBC$ ) or BL

intersecting. Also, note that the global weight,  $erw\_all$ , is not

applicable if  $mer\_all=0$ .

- **max\_scale**

Relative maximum spacing.

The relative maximum spacing ( $max\_scale$ ) is used along with the reference length ( $ref\_len$ ) to set the maximum spacing used for flat surfaces, except farfield or symmetry plane surfaces, if any.

$max\_spacing = max\_scale * ref\_len$

- **ideal\_min\_scale**

Relative ideal minimum spacing.

The relative ideal minimum spacing ( $ideal\_min\_scale$ ) is used along with the

reference length ( $ref\_len$ ) to categorize individual surfaces, except farfield

or symmetry plane surfaces, if any.

$ideal\_min\_spacing = ideal\_min\_scale * ref\_len$

- **curv\_min\_scale**

Relative curvature minimum spacing limit.

The relative minimum spacing limit ( $curv\_min\_scale$ ) can be used along with the

reference length ( $ref\_len$ ) to limit the minimum spacing used for curved

surfaces, except farfield or symmetry plane surfaces, if any. Note that using

the default value of zero for  $curv\_min\_scale$  will allow the surface curvature to

determine the minimum spacing based on the  $curv\_angle$  and geometry evaluation

tolerance (from CAD geometry data). Setting a non-zero value of  $min\_scale$  (e.g.

$min\_scale=0.005$ ) may be useful for successfully meshing a case with a poorly

defined geometry. It is not needed for well defined geometry.

$curv\_min\_spacing = curv\_min\_scale * ref\_len$

- **abs\_min\_scale**

Relative proximity minimum spacing.

The relative proximity minimum spacing (prox\_min\_scale) is used along with the reference length (ref\_len) to limit the minimum spacing produced by proximity checking between component/body surfaces (see auto\_mode).

$$\text{prox\_min\_spacing} = \text{prox\_min\_scale} * \text{ref\_len}$$

- **Mesh\_Length\_Factor = 1**

Global scaling factor to increase or decrease mesh resolution.

ref\_len:

Reference length for components/bodies in grid units. Reference length should be set to a physically relevant characteristic length for the configuration such as wing chord length or pipe diameter. If ref\_len = 0 then it will be set to the bounding box for the largest component/body of interest.

The parameters ref\_len, max\_scale, min\_scale and abs\_min\_scale are all used to set spacing values on all component/body surfaces (those that are not on the farfield or symmetry plane-if any).

$$\text{max\_spacing} = \text{max\_scale} * \text{ref\_len}$$

$$\text{min\_spacing} = \text{min\_scale} * \text{ref\_len}$$

$$\text{abs\_min\_spacing} = \text{abs\_min\_scale} * \text{ref\_len}$$

- **Mesh\_Sizing = NULL**

See [Mesh Sizing](#) for additional details.

- **Multiple\_Mesh = "SingleDomain"**

If "SingleDomain": Generate a single surface mesh file assuming multiple bodies define a single computational domain (i.e. CFD)

If "MultiFile": Generate a surface mesh file for each body.

If "MultiDomain": Generate a single mesh file containing multiple surface meshes for each body.

- **EGADS\_Quad = False**

If true, apply EGADS quadding to the AFLR4 triangulation.

- **AFLR4\_Quad = False**

If true, apply -quad flag for AFLR4 quadding.

- **skin = False**

If true, apply -skin flag to automatically set the grid BCs for structural cases.

## 0.4 AIM Outputs

The following list outlines the AFLR4 AIM outputs available through the AIM interface.

- **Done**

True if a surface mesh was created on all surfaces, False if not.

- **NumberOfNode**

Number of vertices in the surface mesh

- **NumberOfElement**  
Number of elements in the surface mesh
- **NumberOfTri**  
Number of triangle elements in the surface mesh
- **NumberOfQuad**  
Number of quadrilateral elements in the surface mesh
- **Surface\_Mesh**  
The surface mesh for a link.

## 0.5 Mesh Sizing

NOTE: Available mesh sizing parameters differ between mesh generators.

Structure for the mesh sizing tuple = ("CAPS Mesh Name", "Value"). "CAPS Mesh Name" defines the caps↔ Mesh on which the sizing information should be applied. The "Value" can either be a JSON String dictionary (see Section [JSON String Dictionary](#)) or a single string keyword string (see Section [Single Value String](#))

### 0.5.1 JSON String Dictionary

If "Value" is a JSON string dictionary (e.g. "Value" = {"edgeDistribution": "Even", "numEdgePoints": 100}) the following keywords (= default values) may be used:

- **bcType = (no default)**  
Sets the AFLR\_GBC attribute on faces. Options:
  - Farfield or Freestream or FARFIELD\_UG3\_GBC  
Farfield surface same as a standard surface except w/AFLR4
  - Viscous or -STD\_UG3\_GBC  
Standard BL generating surface
  - Inviscid or STD\_UG3\_GBC  
Standard surface
  - Symmetry or BL\_INT\_UG3\_GBC or BoundaryLayerIntersect  
Symmetry or standard surface that intersects BL region
  - TRANSP\_SRC\_UG3\_GBC  
Embedded/transparent surface converted to source nodes by AFLR
  - TRANSP\_BL\_INT\_UG3\_GBC  
Embedded/transparent surface that intersects BL region
  - TRANSP\_UG3\_GBC  
Embedded/transparent surface
  - -TRANSP\_UG3\_GBC  
Embedded/transparent BL generating surface
  - TRANSP\_INTRNL\_UG3\_GBC  
Embedded/transparent surface converted to internal faces by AFLR
  - FIXED\_BL\_INT\_UG3\_GBC  
Fixed surface with BL region that intersects BL region

- **bcType = (no default)**

Sets the AFLR\_GBC attribute on faces. Options:

- Farfield or Freestream or FARFIELD\_UG3\_GBC  
Farfield surface same as a standard surface except w/AFLR4
- Viscous or -STD\_UG3\_GBC  
Standard BL generating surface
- Inviscid or STD\_UG3\_GBC  
Standard surface
- Symmetry or BoundaryLayerIntersect or BL\_INT\_UG3\_GBC  
Standard surface that intersects BL region
- TRANSP\_SRC\_UG3\_GBC  
Embedded/transparent surface converted to source nodes by AFLR
- TRANSP\_BL\_INT\_UG3\_GBC  
Embedded/transparent surface that intersects BL region
- TRANSP\_UG3\_GBC  
Embedded/transparent surface
- -TRANSP\_UG3\_GBC  
Embedded/transparent BL generating surface
- TRANSP\_INTRNL\_UG3\_GBC  
Embedded/transparent surface converted to internal faces by AFLR
- FIXED\_BL\_INT\_UG3\_GBC  
Fixed surface with BL region that intersects BL region

- **scaleFactor = (no default)**

scaleFactor sets the AFLR4\_Scale\_Factor attribute on faces/edges.

See AFLR4\_Scale\_Factor in [AIM Attributes](#) for additional details.

- **edgeWeight = (no default) [Range 0 to 1]**

edgeWeight sets the AFLR4\_Edge\_Refinement\_Weight attribute on faces.

See AFLR4\_Edge\_Refinement\_Weight in [AIM Attributes](#) for additional details.

## 0.5.2 Single Value String

If "Value" is a single string, the following options maybe used:

- (NONE Currently)



# Bibliography

- [1] David L. Marcum. Unstructured grid generation using automatic point insertion and local reconnection. *The Handbook of Grid Generation*, pages 18–1, 1998. [1](#)
- [2] David L. Marcum and Nigel P. Weatherill. Unstructured grid generation using iterative point insertion and local reconnection. *AIAA Journal*, 33(9):1619–1625, Sep. 1995. [1](#)





# Index

AIM Attributes, [2](#)

AIM Inputs, [4](#)

AIM Outputs, [7](#)

Introduction, [1](#)

Mesh Sizing, [8](#)