

Engineering Sketch Pad (ESP)



Training Session 2 Solids Fundamentals (1)

John F. Dannenhoffer, III

jfdannen@syr.edu
Syracuse University

Bob Haimes

haimes@mit.edu
Massachusetts Institute of Technology

updated for v1.18

- Build Stack
- Primitive Bodys
- Types of Bodys
- Boolean Operations
- Transformations
- Homework Exercises


- OpenCSM uses the idea of a “stack” to keep track of Bodys
- A stack is a general first-in-last-out data structure that has the following characteristics:
 - a stack starts off being empty
 - an item (Bodys) can be “pushed” onto the top of the stack, causing the stack to grow in size
 - an item (Body) can be “popped” off the top of the stack, causing the stack to shrink in size

Operation	Stack contents after operation	Results
Start	(empty)	(none)
Push A	A	(none)
Push B	A B	(none)
Push C	A B C	(none)
Pop	A B	C
Push D	A B D	(none)
Pop	A B	D
Pop	A	B

Note: if these were Body(s), Body A would be visible in ESP after the build process

- A primitive is a Branch that creates a new Body based solely upon its arguments
- Primitives pop NO entities from the stack
- Primitives push one Body onto the stack
- Built-in primitives include:
 - POINT — Node at given location
 - BOX — starting location and size
 - SPHERE — center and radius
 - CYLINDER — beginning center, ending center, and radius
 - CONE — base center, vertex, and radius
 - TORUS — center, orientation, major- and minor-radii

BOX xbase ybase zbase dx dy dz

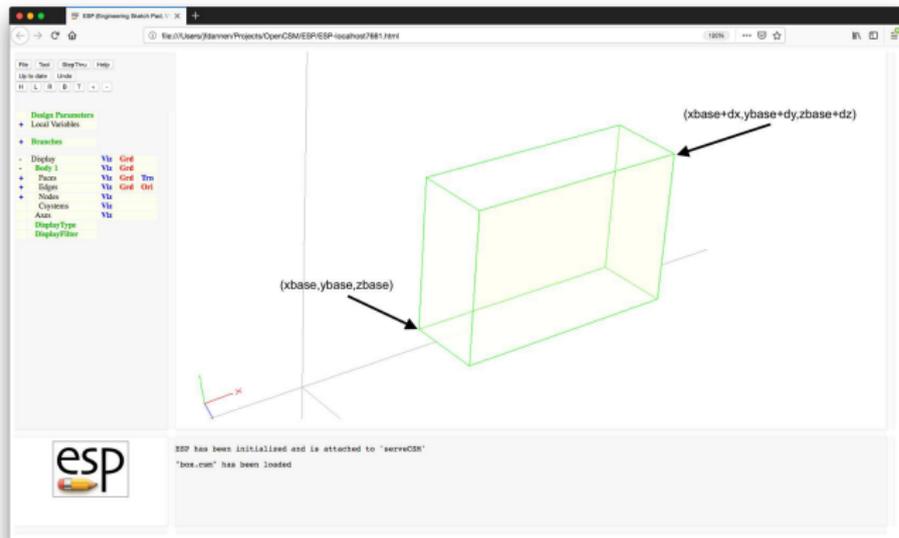


• Face-order:

- 1: x min
- 2: x max
- 3: y min
- 4: y max
- 5: z min
- 6: z max


- Special rules for a BOX
 - if $dx=0$, or $dy=0$, or $dz=0$, a SheetBody is created
 - if $dx=dy=0$, or $dy=dz=0$, or $dz=dx=0$, a WireBody is created
 - if $dx=dy=dz=0$, a NodeBody is created

SPHERE xcent ycent zcent radius

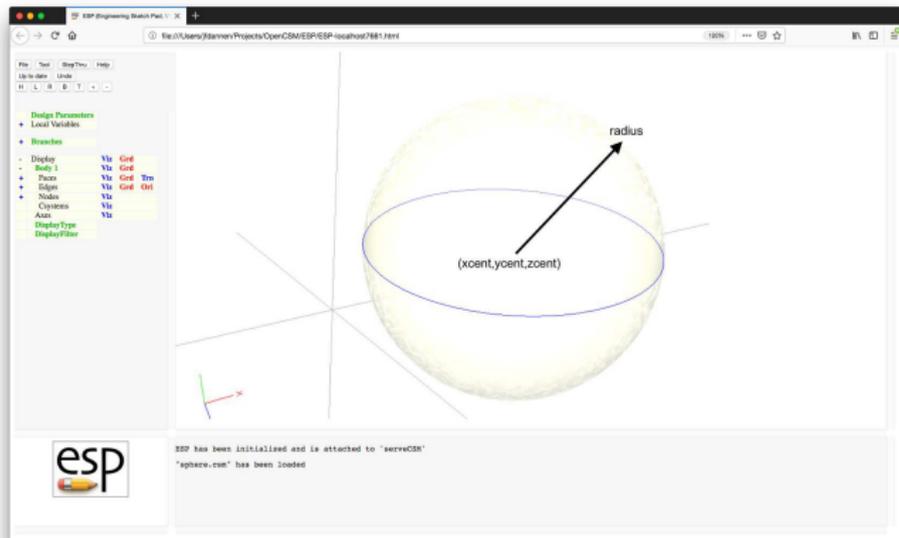


- Face-order:
 - 1: y min
 - 2: y max

CYLINDER xbeg ybeg zbeg xend yend zend radius

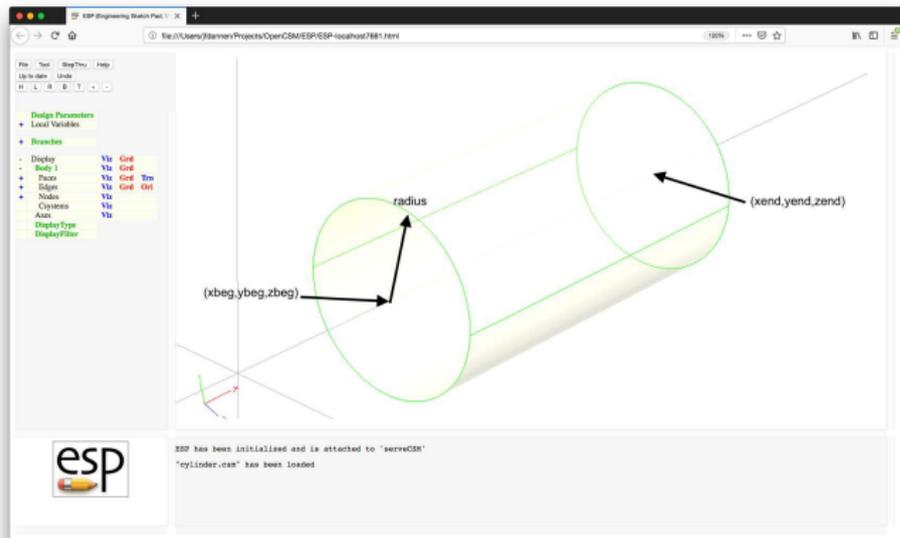


- Face-order:
 - 1: beg
 - 2: end
 - 3: y min
 - 4: y max

CONE $xvrtx$ $yvrtx$ $zvrtx$ $xbase$ $ybase$ $zbase$ $radius$

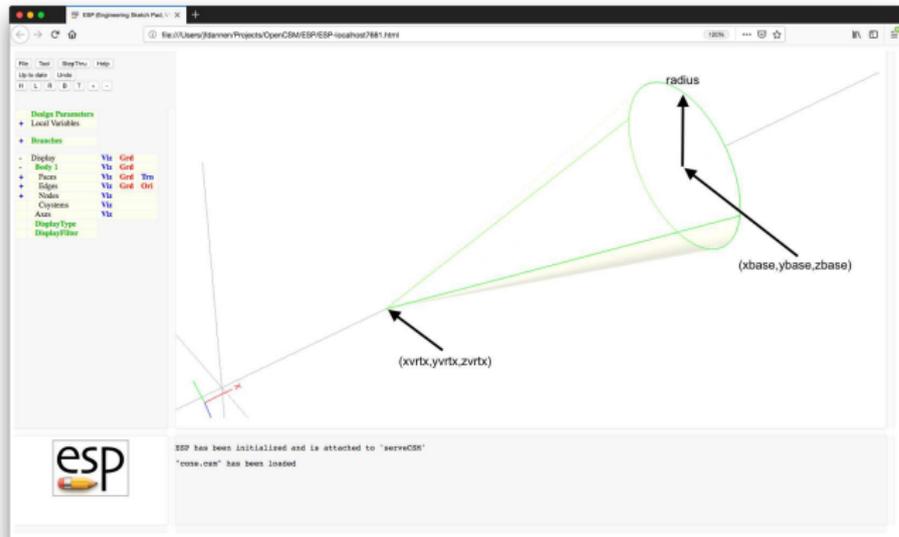


- Face-order:
 - 1: (empty)
 - 2: base
 - 3: y min
 - 4: y max

TORUS `xcent ycent zcent dxaxis dyaxis dzaxis majorRad minorRad`

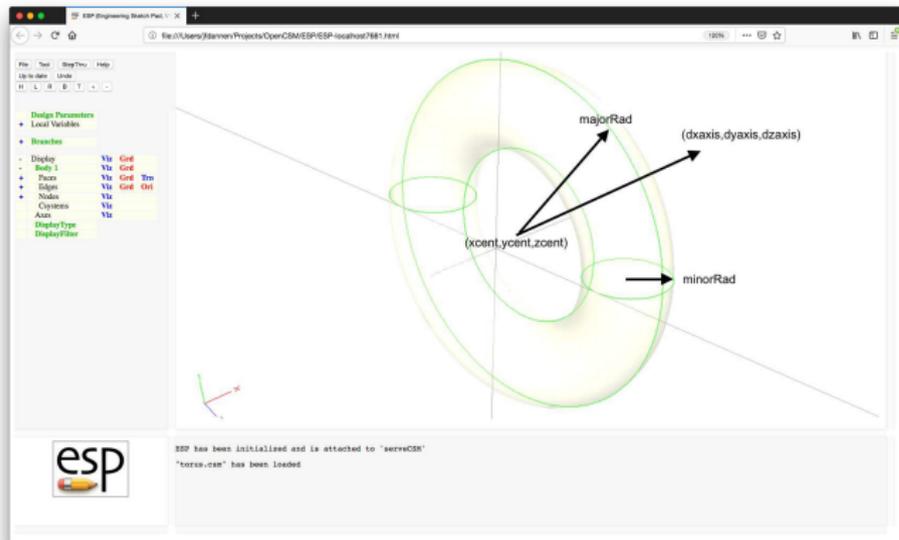

• Face-order:

- 1: x min, y min
- 2: x max, y max
- 3: x max, y min
- 4: x min, y max

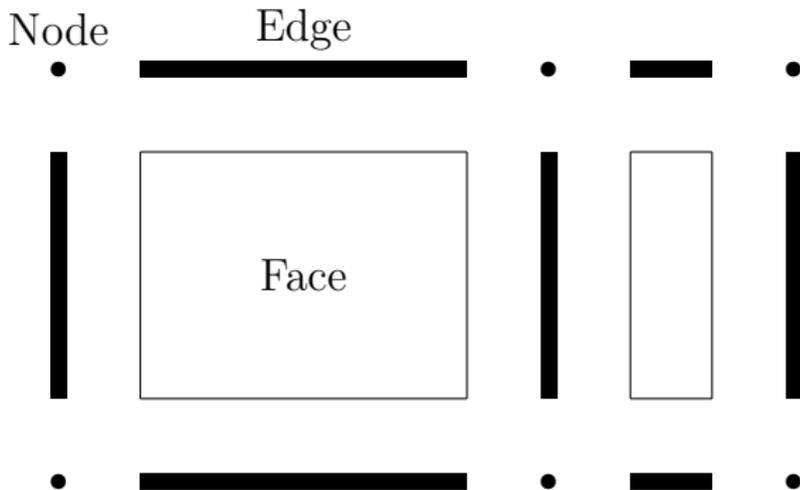

- Node
 - a location in 3D space that serves as the terminus for one or more Edges
- Edge
 - is associated with a 3D curve (if not degenerate)
 - has a range of parametric coordinates, t , from t_{\min} to t_{\max}
 - the positive orientation goes from t_{\min} to t_{\max}
 - has a Node at t_{\min} and t_{\max}
 - if the Nodes at t_{\min} and t_{\max} are the same, the Edge forms a closed Loop (that is, is periodic) or is degenerate (if t_{\min} equals t_{\max}); otherwise it is open

- Loop
 - free standing collection of one or more connected Edges with associated senses
 - if the Loop is closed, each of the corresponding Nodes is associated with exactly two Edges
 - if the Loop is open, the intermediate Nodes are each associated with two Edges and the Nodes at the ends each correspond to one Edge
 - the sense of the Loop is associated with the order of the Edges in the Loop and their associated senses
- Face
 - a surface bounded by one or more Loops with associated senses
 - there may be only one outer Loop (sense = 1) and any number of inner Loops (sense = -1)
 - associated Loops must be closed

- Shell
 - a collection of one or more connected Faces
 - if all the Edges associated with a Shell are used by exactly two Faces in the Shell, the Shell is closed (manifold) and it segregates regions of 3D space; otherwise the Shell is open
- Body
 - a free-standing object

- SolidBody
 - Body that has an inside and outside
 - Bounded by a Shell
 - May contain one or more holes, each of which is defined by a Shell
- SheetBody
 - a single Shell that can be either non-manifold (open) or manifold (closed)
- WireBody
 - a single Loop
- NodeBody
 - a single Node (represented internally as a degenerate WireBody)


- Pops two* Bodys off the stack
- Pushes the result onto the stack
- Supported Booleans include:
 - UNION — combine the input Bodys
 - INTERSECT — find the “common” parts of the input Bodys
 - if more than one Body results, order them based upon the `$order` argument and keep the `index`'th one
 - SUBTRACT — remove one Body from the other
 - if more than one Body results, order them based upon the `$order` argument and keep the `index`'th one

- All Booleans have an optional tolerance that can be used in cases when `OpenCASCADE`'s geometric and topological tolerances cause an error
 - if the prescribed tolerance is positive, `OpenCSM` will first try its default tolerance; if unsuccessful, the tolerance will be loosened until it is successful or it reaches the specified tolerance
 - if the prescribed tolerance is negative, `OpenCSM` will only try to use the absolute value of the given tolerance



Boolean Operation — UNION

Note: Original Bods and result of UNION are shown

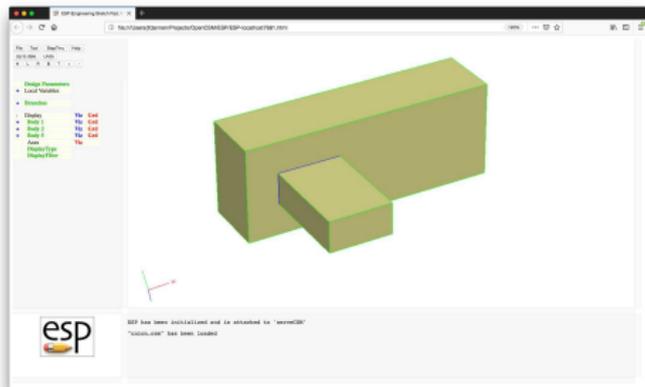

union

BOX 0 0 0 8 3 2

BOX 1 1 0 2 1 5

BOX 0 0 0 8 3 2

BOX 1 1 0 2 1 5

UNION

END


- If `tomark` is 0 (not set)
 - If the two `Bodys` on the top of the Stack are both `SolidBodys`, a `SolidBody` that is the combination of its input `Bodys` is created
 - If the two `Bodys` on the top of the Stack are both `SheetBodys`, a `SheetBody` that is the combination of its input `Bodys` is created
 - Note: `WireBodys` cannot be UNIONed (use JOIN instead)
 - Note: the two `Bodys` on the top of the stack must be the same type

- If `tomark` is not 0 (is set)
 - All the `SolidBodys` back to the `Mark` are combined
 - If other `Body` types are encountered, an error results
- If `trimList` is a list of six semicolon-separated numbers and `tomark` is not set and the `Bodys` on the top of the `Stack` are both `SolidBodys`, then the `UNION` is trimmed to only keep the part of `Body2` that contains the point prescribed in the `trimList`



Boolean Operation — INTERSECT

Note: Original Bods and result of INTERSECT are shown

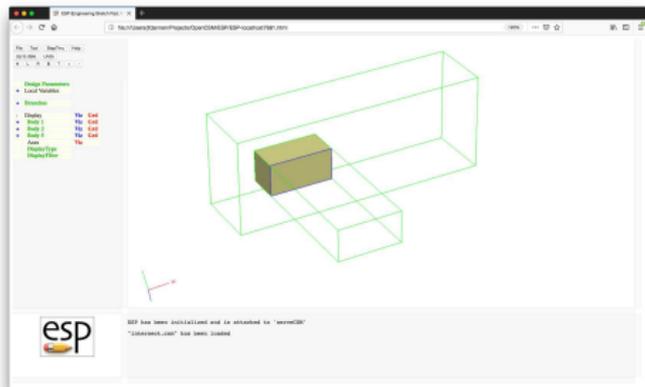

intersect

BOX 0 0 0 8 3 2

BOX 1 1 0 2 1 5

BOX 0 0 0 8 3 2

BOX 1 1 0 2 1 5


INTERSECT

END

- If both Bodies on the top of the Stack are SolidBodys
 - a SolidBody that is the common part of its inputs is created
- If one Body on the top of the Stack is a SolidBody and the other is a SheetBody
 - a SheetBody is created that is the part of the input SheetBody that is inside the SolidBody
- If one Body on the top of the Stack is a SolidBody and the other is a WireBody
 - a WireBody is created that is the part of the input WireBody that is inside the SolidBody
- Other combinations of input Bodys are not allowed

esp Boolean Operation — SUBTRACT

Note: Original Bods and result of SUBTRACT are shown

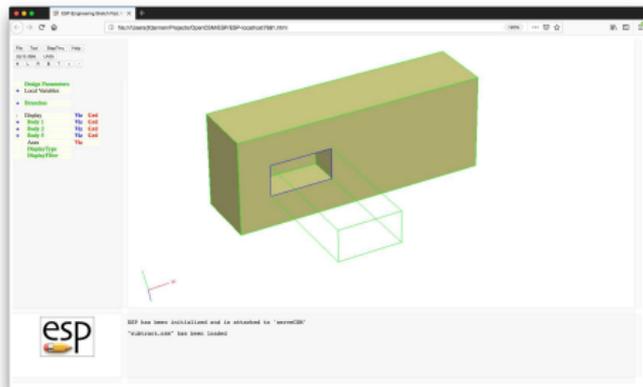

subtract

BOX 0 0 0 8 3 2

BOX 1 1 0 2 1 5

BOX 0 0 0 8 3 2

BOX 1 1 0 2 1 5

SUBTRACT

END

- Call the last Body on the Stack Body2 and the next-to-last Body Body1
- If Body1 and Body2 are both SolidBodys
 - create a SolidBody that is the part of Body1 that is outside Body2
- If Body1 is a SheetBody and Body2 is a Solid Body
 - create a SheetBody that is the part of Body1 that is outside Body2

- If Body1 is a SolidBody and Body2 is a SheetBody
 - create a SolidBody that is the same shape as Body1, but which is scored with the intersection of Body2 (ie, new Nodes and Edges are created), only if the scoring completely cuts Body1
- If Body1 and Body2 are non-coplanar SheetBodys
 - create a SheetBody that is the same shape as Body1, but which is scored with the intersection of Body2 (ie, new Nodes and Edges are created), only if the scoring completely cuts Body1
- If Body1 and Body2 are coplanar SheetBodys
 - create a SheetBodys that is Body1 with Body2 cut out of it
- Other combinations of input Bodys are not allowed

- **JOIN** — two SolidBodys at common Faces, two SheetBodys at common Edges, or two WireBodys at common Node
 - this is much more efficient (and robust) than UNION
- **CONNECT** — two Bodys by creating bridging Faces
 - this requires the user to provide a semicolon-separated list of Face pairs
- **COMBINE** — Bodys (of the same type) since Mark into next higher type entity
 - SheetBodys are combined into a SolidBody if closed; otherwise an open SheetBody is created
 - WireBodys are combined into a SheetBody (only if the WireBodys were co-planar)


- **EXTRACT** — a lower type entity
 - If Body is a SolidBody and $\text{index} > 0$
 - create SheetBody from +index'th Face
 - Elseif Body is a SolidBody and $\text{index} < 0$
 - create WireBody from -index'th Edge
 - Elseif Body is SolidBody and $\text{index} = 0$
 - create SheetBody from outer Shell of Body
 - Elseif Body is SheetBody and $\text{index} > 0$
 - create SheetBody from +index'th Face
 - Elseif Body is SheetBody and $\text{index} < 0$
 - create WireBody from -index'th Edge
 - Elseif Body is SheetBody and $\text{index} = 0$
 - create WireBody from outer Loop (currently not implemented)
 - Note: more than one entity can be extracted if the argument is a semicolon-separated list

- Pops one Group off the stack
- Pushes the transformed Group onto the stack
- Supported transformations include:
 - **TRANSLATE** — move the entity to another location
 - **ROTATEX**, **ROTATEY**, **ROTATEZ** — rotate the entity around an axis that is parallel to the x -, y -, or z -axis
 - **SCALE** — change the size of the entity
 - **MIRROR** — create the mirror image of the entity across an arbitrary plane (specified by a unit normal and distance from the origin)
 - **APPLYCSYS** — apply transformation given by a **CSYSTEM**
 - ...

- ...
 - **REORDER** — change the order in which the Edges are listed in a Sketch
 - this does **NOT** change the geometry
 - sometimes useful before calling **RULE** or **BLEND**
 - often the **reorder** argument to **RULE** or **BLEND** is preferable


- Other primitives include:
 - **IMPORT** — create a Body by reading from an external file:
 - `.step`, `.stp`, and `.STEP`
 - `.iges` and `.igs`
 - `.egads`
 - **UDPRIM** — execute a user-defined primitive
 - arguments are provided in keyword-value pairs
 - arguments can be “pre-loaded” with **UDPARG** statements
 - keywords are defined by the writer of the UDP
 - **RESTORE** — Body that was previously built (during the current build process) and “stored” can be restored
 - all attributes are kept during the **STORE** and **RESTORE**

- U-shaped bracket
- Simple block
- Files in `$ESP_ROOT/training/ESP/data/session02` will get you started
 - the files contain the various Design Parameters (DESPMTRs) in the tables on the following pages
 - for now, build up your configuration in **ESP** by pressing **Branches** in the Tree Window and then filling in the necessary information
 - you can always press the **Undo** button if you make a mistake
 - you will need to add **BOX**, **CYLINDER**, **UNION**, **SUBTRACT**, **TRANSLATE**, **SCALE**, **ROTATEX**, **ROTATEY**, and **ROTATEZ** commands/statements

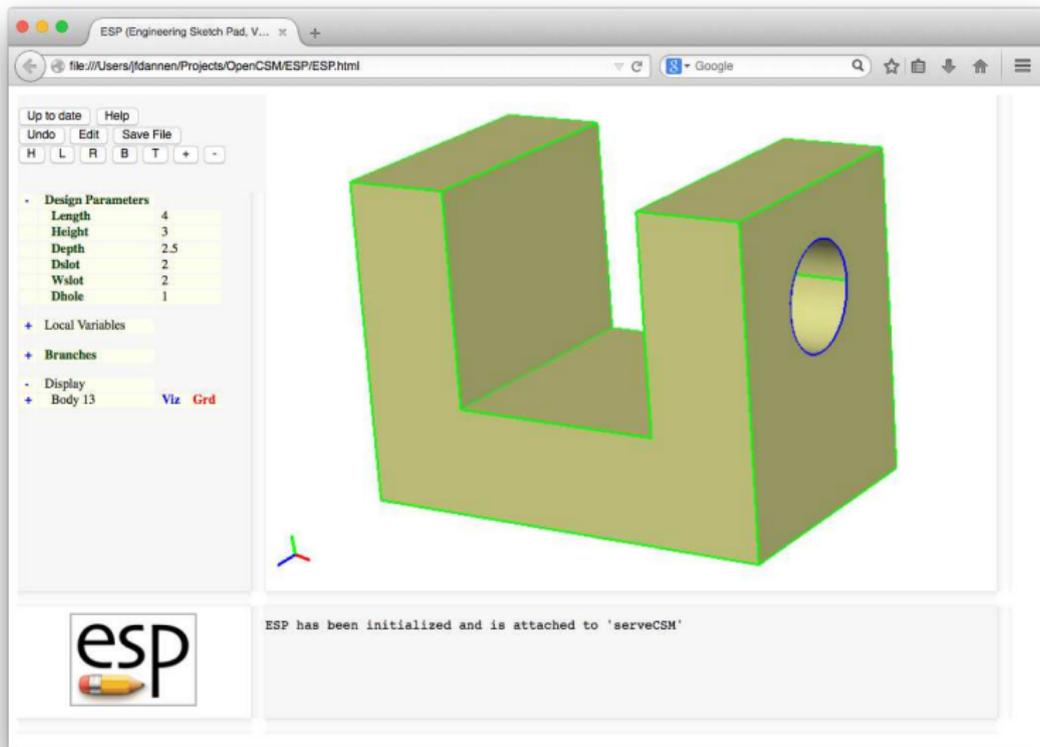

Length	length in (X -direction)	4.00
Height	height of the two legs (Y -direction)	3.00
Depth	depth (in Z -direction)	2.50
Dslot	depth of slot (in Y -direction)	2.00
Wslot	width of slot (in X -direction)	2.00
	slot is centered in X -direction	
Dhole	diameter of hole	1.00
	hole is centered in Z -direction	
	center of hole is down Dhole from top	

- Can you think about two different ways of creating the bracket? What are the consequences?
- What happens when you change a Design Parameter?
- What happens if you make **Dhole** large?

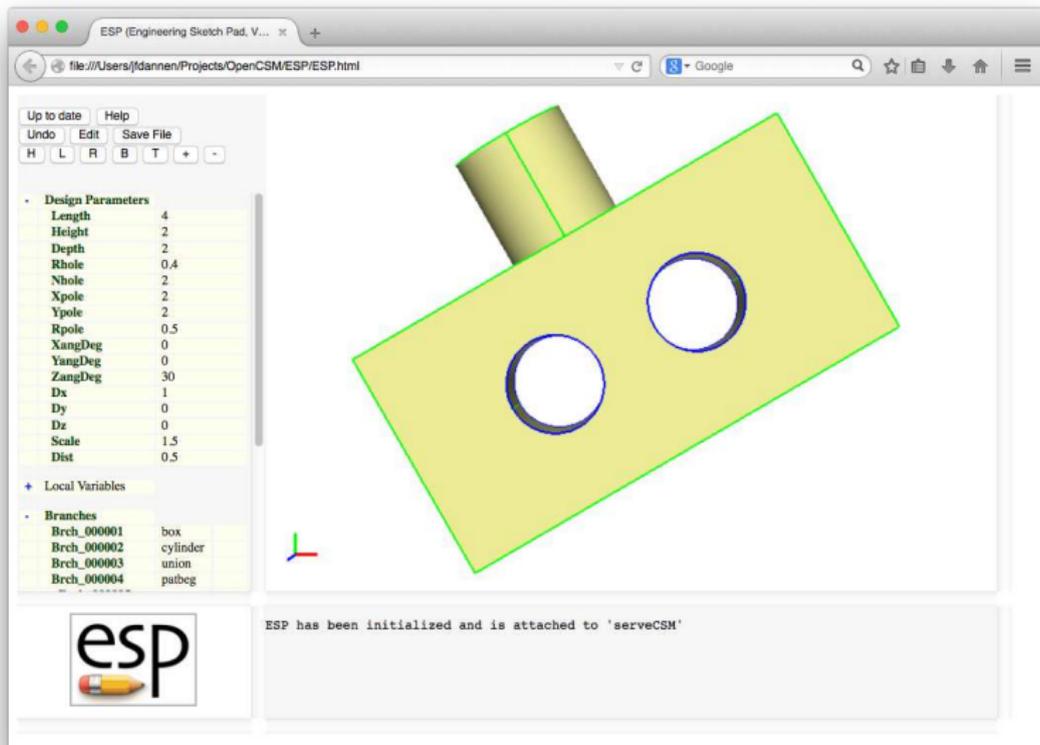

ESP (Engineering Sketch Pad, V...)

file:///Users/fdannan/Projects/OpenCSM/ESP/ESP.html

Up to date Help

Undo Edit Save File

H L R B T + -

• Design Parameters

Length	4
Height	2
Depth	2
Rhole	0.4
Nhole	2
Xpole	2
Ypole	2
Rpole	0.5
XiangDeg	0
YangDeg	0
ZangDeg	30
Dx	1
Dy	0
Dz	0
Scale	1.5
Dist	0.5

+ Local Variables

• Branches

Brch_000001	box
Brch_000002	cylinder
Brch_000003	union
Brch_000004	patbeg

ESP has been initialized and is attached to 'serveCSM'

Box		
Length	length of box	4.0
Height	height of box	2.0
Depth	depth of box anchored at $X = Z = 0$ centered at $Y = 0$	2.0
Holes		
Rhole	radii of the holes	0.4
Nhole	number of holes holes are equally spaced	2
Pole		
Xpole	X -location of top of pole	2.0
Ypole	Y -location of top of pole	2.0
Rpole	radius of pole	0.5

Rotation about origin		
XangDeg	<i>X</i> rotation (deg)	0.
YangDeg	<i>Y</i> rotation (deg)	0.
ZangDeg	<i>Z</i> rotation (deg)	30.
Translation		
Dx		1.0
Dy		0.0
Dz		0.0
Scaling		
Scale	overall scaling factor	1.5

